




MV AquaLinear

WETROOM KIT


Installation Instructions for Timber Floors



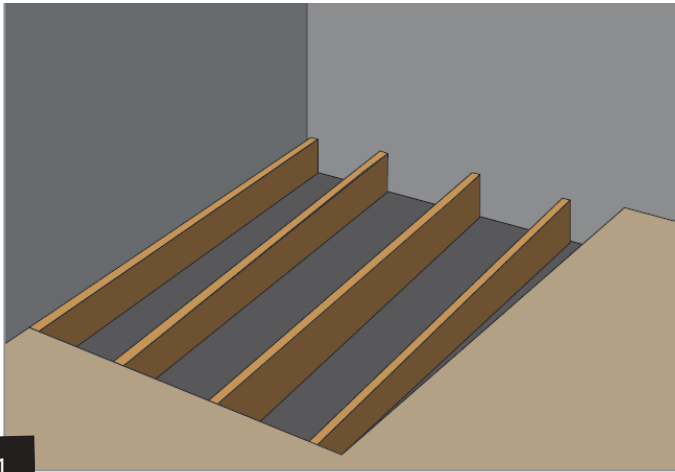


1

Lift floor boards to determine joist positions. The drain can also be fitted in-line with the joists but will be slightly further away from the wall.

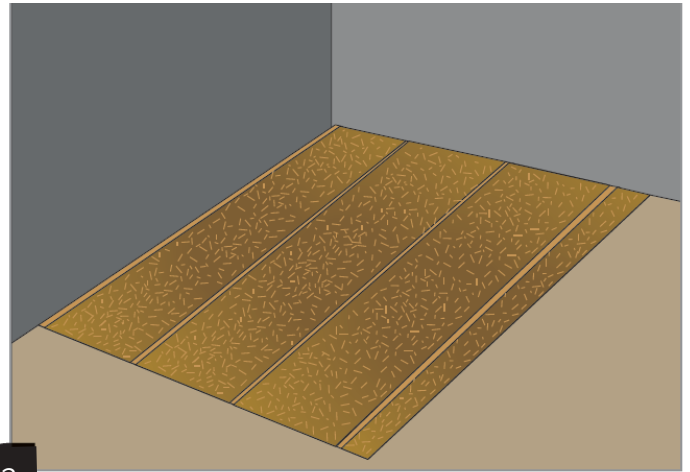


2

Nog between joists with 18mm plyboard to provide sub floor for sloping board.

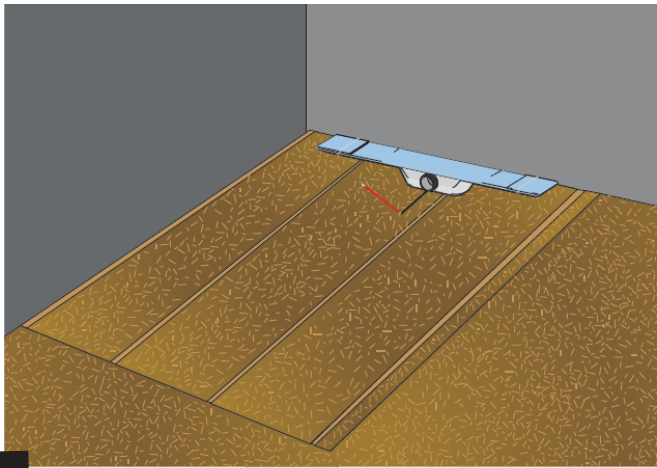


3

Mark the centre of the drain position.

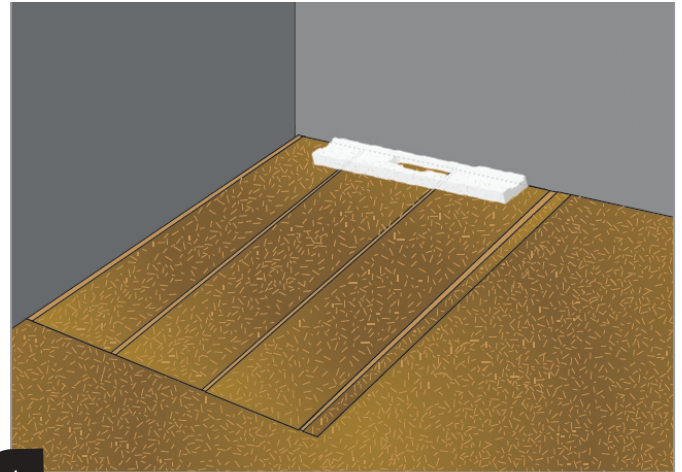


4

Use drain support block as a template to mark out the area that needs to be removed.

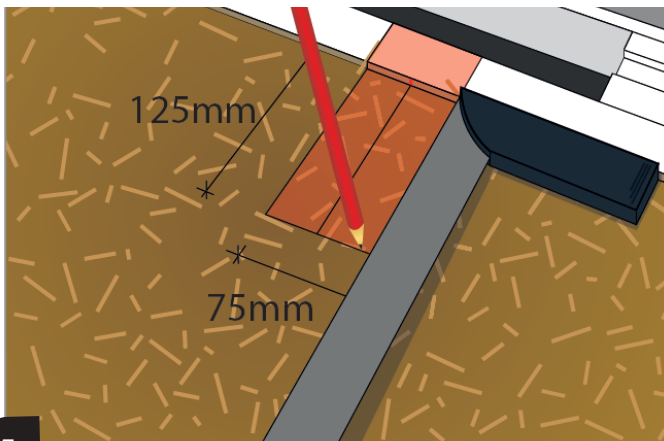


5

Mark area for pipe work access cover plate, This follows the centre line of the drain outlet.

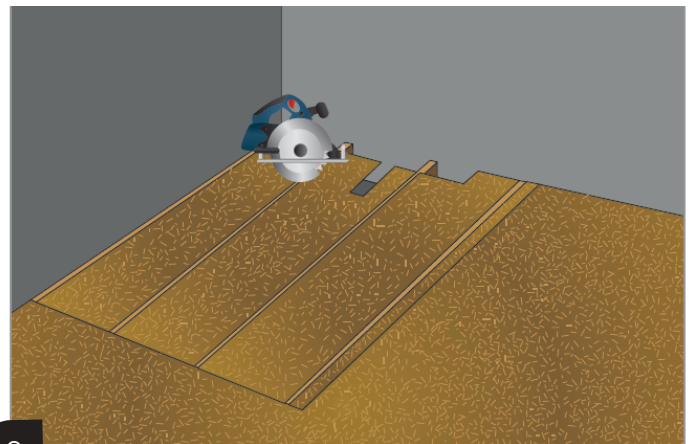


6


Lift sub floor to cut drain support block and drain access area.

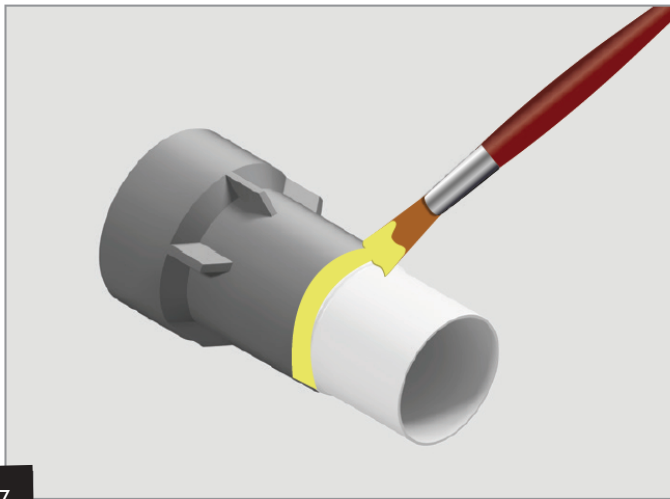


7 UK solvent weld pipe work adapter is included in the kit.

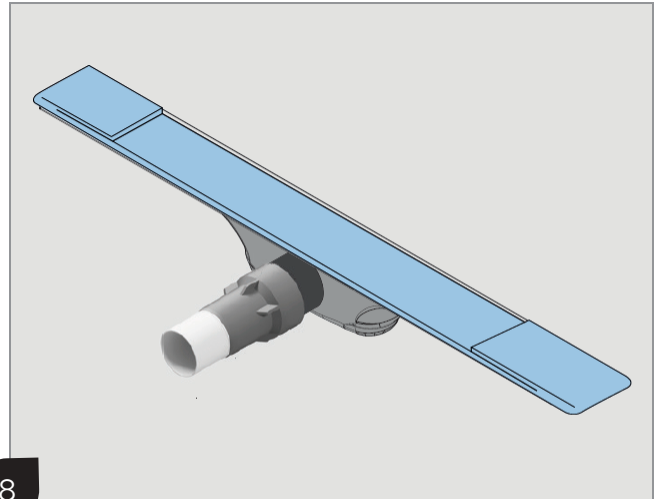


8 Connect the screw fit drain part to the main drain element.

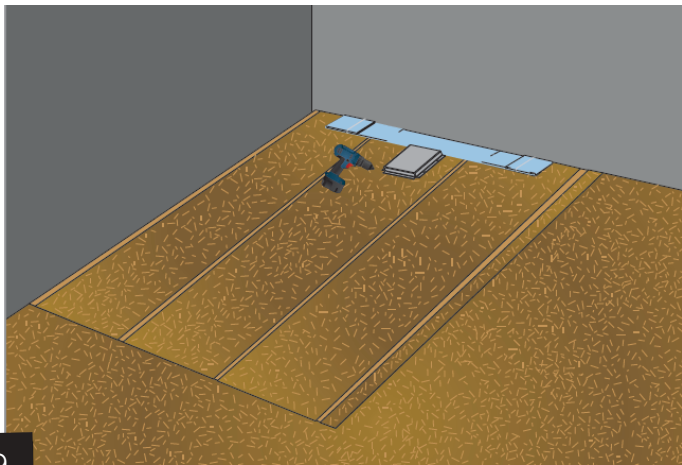


9 Place drain support block into the floor and support the underneath with 18mm plyboard. Connect pipe work, refit sub floor and attach cover plate.

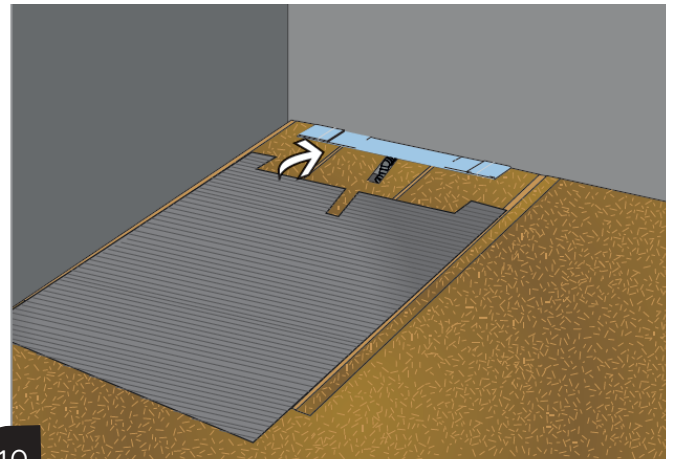


10 Using the same drain and cover plate profile, cut the sloping board to suit and bond down to sub floor with C2 flexible cement based adhesive.

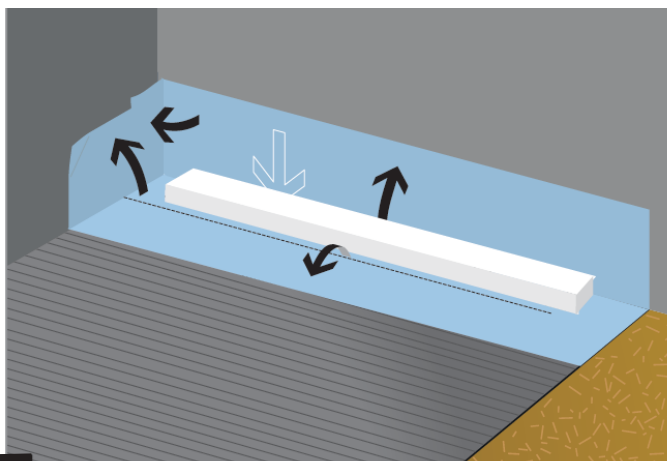

11 Unfold and press the waterproof membrane and lap up the walls and floor

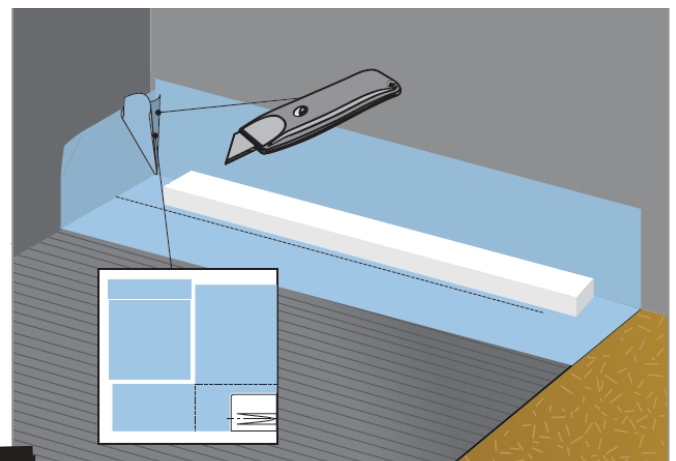


12 Trim the excess from the corner joint.

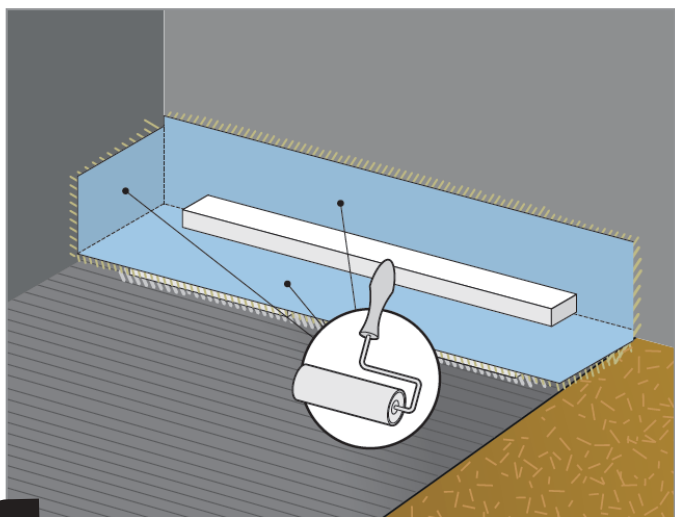


13 Bed the membrane down onto a tile adhesive (EN 12004 C2).




14 Apply polymer sealant in the corners and fit corner pieces.

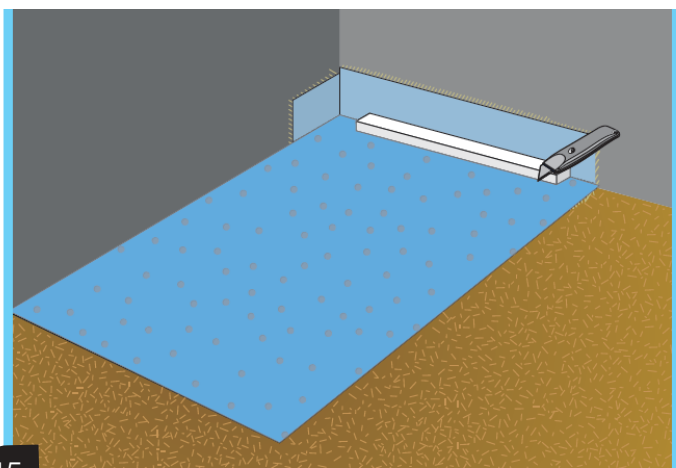


15 Bond waterproof membrane to the shower area with C2 flexible cement based adhesive and lap up the walls.

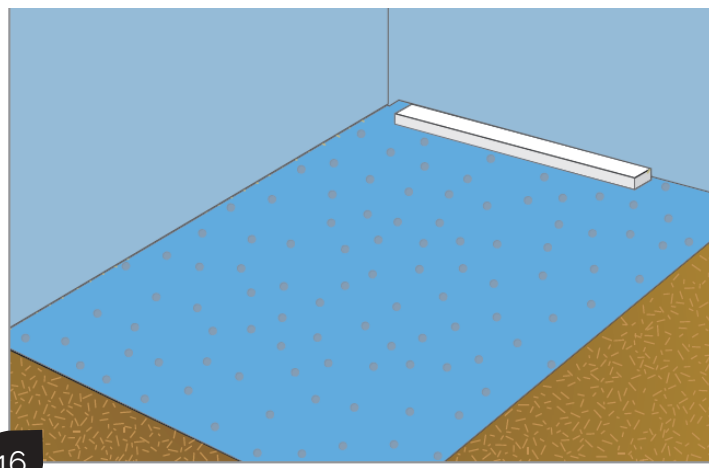


16 The walls can also be waterproofed with the membrane if desired. Then install the wall tiles.

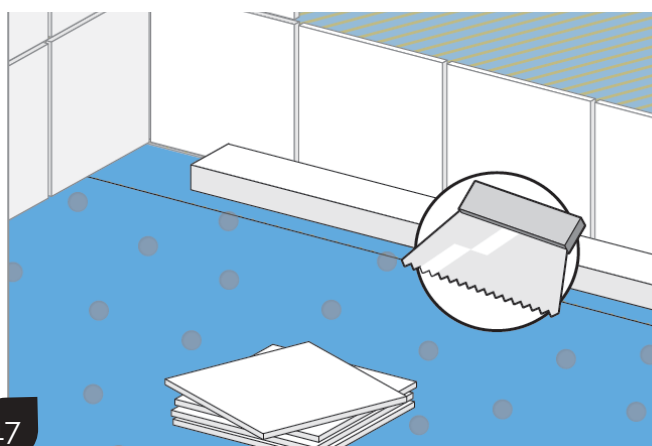

17 Comb the C2 tile adhesive in straight lines 90 degrees to the drain for secondary drainage.

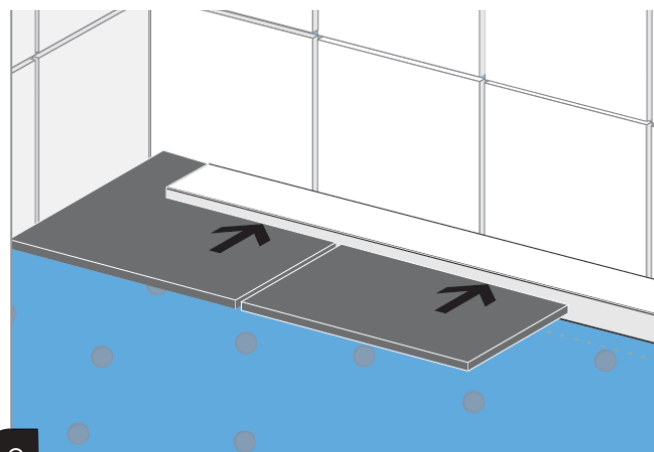


18 Install the floor tiles using the drain tiling template.

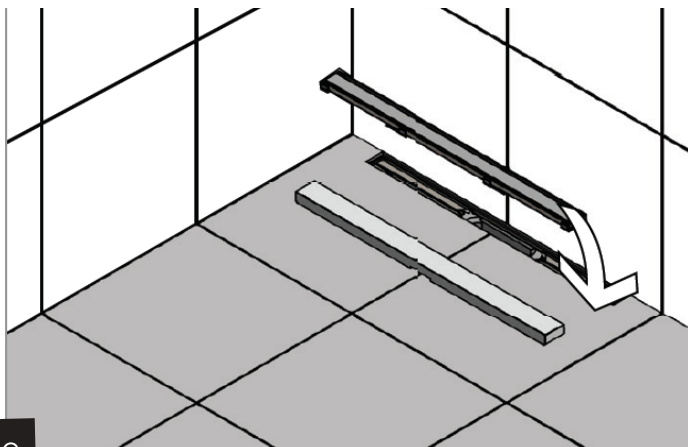


19

Put the grating in place.

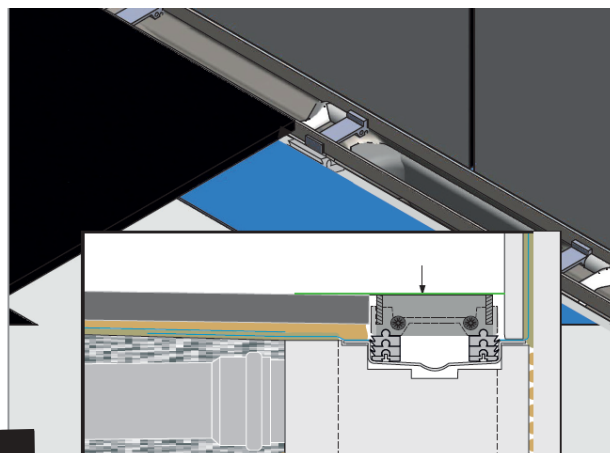


20

Take the grating out of the drain and position the riser blocks to raise the frame.

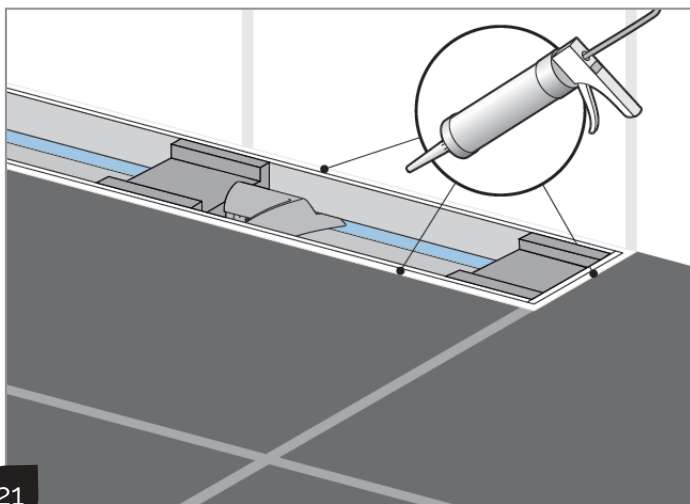


21

Apply silicone around the grate frame.

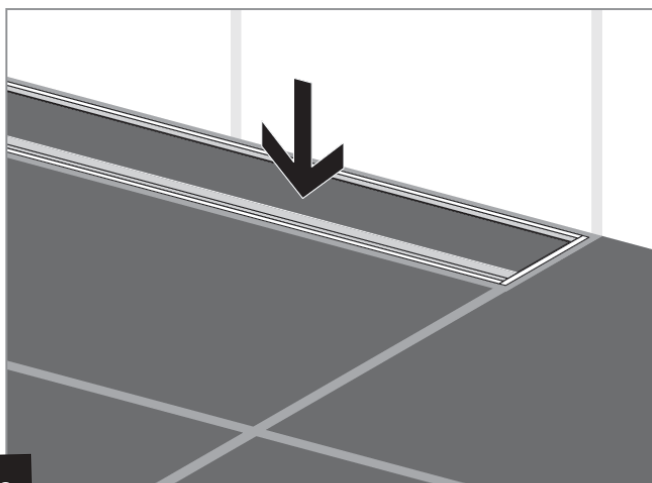

22

Position the profile in the grating.

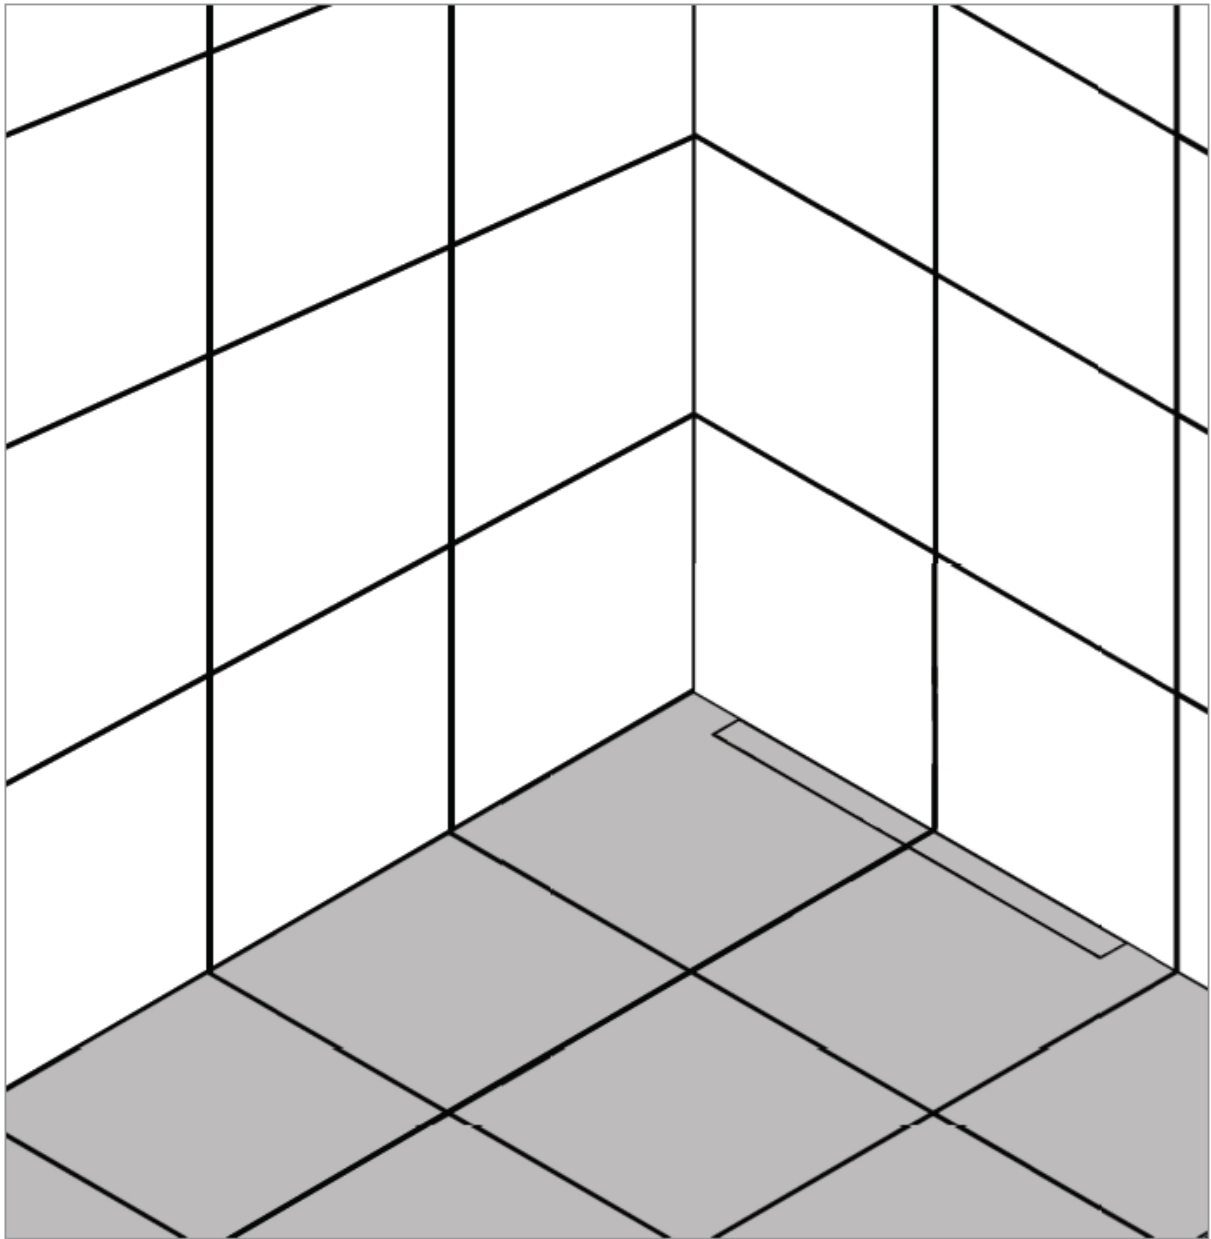

Contact Us

 020 8207 3784
 sales@markvitow.com